Intat A 3/3/18/6

POTENTIAL HAZAR			WASTE SITE		FICATION
SEPA PRELIMINARY				OI STATE	980898 944
PART 1 - SITE INFORMATION AND			D ASSESSMEN	T LAD	100010777
II. SITE NAME AND LOCATION		OO ETRE-	T BOUTENO OF AS	ECIFIC LOCATION IDENTIFIER	
01 SITE NAME (Legal, common, or descriptive name of affect					
Coal Recycling Cor,	P	5W	14 of 50	ect 19 T.85.	-K,5E,
		4 STATE	05 ZIP CODE 00	COUNTY	07COUNTY 08 CONG
Brushy Township 00 COORDINATES LATITUDE LONG 374822.0 0884.	0.	IL	! 	Saline	165 22
09 COORDINATES LATITUDE LONG 37 48 22.0 088 4	AITUDE				
21 70 AZ.D 200 7:	~ ~ ~ ~ ~				
10 DIRECTIONS TO SITE (Starting from rearest public road) See Attache	d Map				
3 6 6 7, 4					
III. RESPONSIBLE PARTIES					
01 OWNER (# Incum)	Till the state of	02 STREE	T (Business, mailing, reside		
Unk	Ì				
03 CITY		04 STATE	05 ZIP CODE	06 TELEPHONE NUMBER	Υ
	1			1()	į į
07 000 TO		00 070=		<u></u>	<u> </u>
07 OPERATOR (If known and different from owner)			T (Business, mailing, read)		
Coal Recycling Cor	P	130	05 Norz	rn yale	
De City	1.	_	11 ZIP CODE	12 TELEPHONE NUMBER	
. Marion	ļ	エム	62959	()	
13 TYPE OF OWNERSHIP (Check one)					
A. PRIVATE B. FEDERAL:			_ C. STATE	□D.COUNTY □ E. MI	INICIPAL
C & OTUER.	(Agency name)		_ 🗆 G. UNKNO	A/N	_
☐ F. OTHER:(SoocPy,)		_ UNKNO	·····	·
14 OWNER/OPERATOR NOTIFICATION ON FILE (Check all that apply)				·	. /
A. RCRA 3001 DATE RECEIVED:	B. UNCONTROLLE	DWAST	E SITE (CERCLA 103 c)	DATE RECEIVED:	AY YEAR
IV. CHARACTERIZATION OF POTENTIAL HAZARD				month, (
	it all that angly)				
DAR	PA 🔲 B. EPA				CONTRACTOR
O YES DATE / DAY YEAR DELL	OCAL HEALTH OFFIC	IAL C	F. OTHER:	(Specify)	
CONTR	ACTOR NAME(S): _			(3000,7)	
02 SITE STATUS (Check one)	03 YEARS OF OPERA				
□ A. ACTIVE □ B. INACTIVE &C. UNKNOWN			1	BUNKNOW	N
		GHAMMA VE	AR ENDING YE		
04 DESCRIPTION OF SUBSTANCES POSSIBLY PRESENT, KNOWN,			11		
Heavy Metals (Toxic /Pe Acids (Corrosive	rsistant	solub	ve)		,
Acide Corposine	/Saluble)		-		
70143 (Correstite	رعانق القادان				
OS DESCRIPTION OF POTENTIAL HAZARD TO ENVIRONMENT AND/OR POPULATION					
6 0 11/ day 100	ulation /F		onmont)		
Jurtace Water Crops	1 1 1 1-	, <i>v) f</i>			
Surface Water (Population/Environment) Ground Water (Population/Environment)					
Cionia itaioi ci oj			_		
V. PRIORITY ASSESSMENT					
01 PRIORITY FOR INSPECTION (Check one. If high or medium is checked, or	omplote Part.2 - Waste Inform	ation and Pa	t 3 - Description of Hezard	out Conditions and incidental	
☐ A. HIGH ☐ B. MEDIUM (Inspection required promptly) ☐ Inspection required	E C. LOW		D. NONE	action reeded, complete current diago	eliton form)
VI. INFORMATION AVAILABLE FROM					
01 CONTACT	02 OF (Agency/Organis)	Hen)			03 TELEPHONE NUMBER
		-			10
AA DEDGAM DECOMMENT F FOR ASSESSMENT	OF ADELIGY	100 000	A117 A 710044	Tan =0	ļ <u> </u>
04 PERSON RESPONSIBLE FOR ASSESSMENT	05 AGENCY		UNIZATION	07 TELEPHONE NUMBER	OB DATE
Richard M. Lange	IEA	HPI	II/PA-SI	1217 1782-6761	3 24,86 MONTH DAY YEAR
504 500H 2070 12 /7 8 H					THE STATE OF TEXAS

EPA Region 5 Records Ctr.
304313

Ω	CC	24
V		M

POTENTIAL HAZARDOUS WASTE SITE PRELIMINARY ASSESSMENT PART 2. WASTE INFORMATION

I. IDENTIFICATION

01 STATE 02 SITE NUMBER

TLD 980 898 944

ACI	<i>7</i> ~		PART 2 - WAST	E INFORMATION	M	ILD 980	898 944
II. WASTES	TATES, QUANTITIES, AN	HO CHARACTER	ISTICS				
	STATES (Check of mail 2009) SLURRY ER. FINES F LIQUID	02 WASTE QUANTI		O3 WASTE CHARACT	OSIVE FINES	UBLE I HIGHLY V CTIOUS J EXPLOSI MMABLE K REACTIV TABLE L INCOMP	NVE VE PATIBLE
. D OTHER	(Specify)	NO OF DRUMS				M NOT AP	
NI. WASTE T							
CATEGORY	SUBSTANCE N	IAME	01 GROSS AMOUNT	02 UNIT OF MEASURE	E 03 COMMENTS		-
SLU	SLUDGE						
OLW	OILY WASTE		<u> </u>	<u></u>			
SOL	SOLVENTS		ļ	 	 		
PSD	PESTICIDES			• • •			
occ	OTHER ORGANIC CH				 		
IOC	INORGANIC CHEMIC	ALS	· · · · · · · · · · · · · · · · · · ·		44,		
ACD	ACIDS		unn	nown	Mine	Spoils	
BAS MES	BASES HEAVY METALS		11.6.	1			
	OUS SUBSTANCES (See As	eneral in most frequen	LAAT	OWIL			
OI CATEGORY	OZ SUBSTANCE NA		03 CAS NUMBER	04 STORAGE DIS	SPOSAL METHOD	05 CONCENTRATION	06 MEASURE OF CONCENTRATION
				 			COMORIALISATION
	i					†	
	<u> </u>		 	 		+	
j						<u> </u>	
			1	///			
			MA	TUTC			
		TYA	1110				
		TAL	-				
		V'				I	
	Ĺ		<u> </u>	_			ļ
							
						 	
	<u></u>		<u> </u>	<u> </u>		<u> </u>	<u> </u>
V. FEEDSTO	OCKS (See Appendix for CAS Mumbe	iersi					
CATEGORY	01 FEEDSTOC	K NAME	02 CAS NUMBER	CATEGORY	01 FEEDS1	TOCK NAME	02 CAS NUMBER
FDS				FDS			
FDS				FDS			
FDS				FDS			
FDS				FDS			
VI. SOURCES	S OF INFORMATION ICA	specific references, e.g.	state files: sample analysis.	reports)			
	(SIA;	IL. Shat	he Reclama	ztionPlan	for Abai	ndoned Mine "UnID M"	:Lland)
	Countre	1/0+4.51	-A #00015	-Cn+y 199	; AML: Tr	"UNID M"_)

POTENTIAL HAZARDOUS WASTE SITE PRELIMINARY ASSESSMENT PART 3 - DESCRIPTION OF HAZARDOUS CONDITIONS AND INCIDENTS

I. IDENTIFICATION

01 STATE 02 SITE NUMBER ILD 980898 944

II. HAZARDOUS CONDITIONS AND INCIDENTS 01 MA. GROUNDWATER CONTAMINATION 02 LI OBSERVED (DATE POTENTIAL ALLEGED 03 POPULATION POTENTIALLY AFFECTED 04 NARRATIVE DESCRIPTION Rural pop. dependent on G.W.; Sparce 01 ME SURFACE WATER CONTAMINATION ULL. 02 TO OBSERVED (DATE O4 NARRATIVE DESCRIPTION POTENTIAL .: ALLEGED Must public supplies utilize surface water as source of Supply. Extensive Recreational Uses of Surface water. 01 C CONTAMINATION OF AIR 02 CORSERVED (DATE POTENTIAL 03 POPULATION POTENTIALLY AFFECTED 04 NAPRATIVE DESCRIPTION 02 TO OBSERVED (DATE POTENTIAL ☐ ALLEGED 01 C D FIRE/EXPLOSIVE CONDITIONS 03 POPULATION POTENTIALLY AFFECTED . **04 NARRATIVE DESCRIPTION** 02 C OBSERVED (DATE POTENTIAL ALLEGED 01 E DIRECT CONTACT 03 POPULATION POTENTIALLY AFFECTED ___ **04 NARRATIVE DESCRIPTION** 01 (F CONTAMINATION OF SOIL 02 C OBSERVED (DATE **POTENTIAL** .: ALLEGED 03 AREA POTENTIALLY AFFECTED __ **04 NARRATIVE DESCRIPTION** Acres 01 LG DRINKING WATER CONTAMINATION 02 LI OBSERVED (DATE **POTENTIAL** ALLEGED 04 NARRATIVE DESCRIPTION See A&B above 01 H WORKER EXPOSURE/INJURY 02 [OBSERVED (DATE _ POTENTIAL ... ALLEGED 03 WORKERS POTENTIALLY AFFECTED. **04 NARRATIVE DESCRIPTION** 02 [] OBSERVED (DATE 01 DT POPULATION EXPOSURE/INJURY [] POTENTIAL L ALLEGED 03 POPULATION POTENTIALLY AFFECTED. ____ 04 NARRATIVE DESCRIPTION

⊕EPA

POTENTIAL HAZARDOUS WASTE SITE PRELIMINARY ASSESSMENT

		TIFICATION
01 5	TATE	02 SITE NUMBER
I.	LD.	980898944

ERVED (DATE:) 🗆 POTENTIAL	□ ALLEGED
ERVED (DATE:		□ ALLEGED
stry in thi	is afta.	
ERVED (DATE:	POTENTIAL	☐ ALLEGED
fish.		
ERVED (DATE:) DOTENTIAL	□ ALLEGED
TIVE DESCRIPTION		
ERVED (DATE) DOTENTIAL	□ ALLEGED
ERVED (DATE:	POTENTIAL	□ ALLEGED
ERVEO (DATE	POTENTIAL	☐ ALLEGED
os		
		<u> </u>
reportal		
вроиз	<u></u>	

FOX BROTHERS FEED & SEED



"Bill" & "Gene"

SEED & FEED — SEED CLEANING — BULK FERTILIZER — LIME STONE

Phone: (618) 273-3617 • 1401 Grand Avenue, Eldorado, Illinois 62930

EXECUTIVE SUMMARY

This site has been placed in the ERRIS/CERCLIS data base as a result of its identification during the Surface Impoundment Assessment (SIA). Certain other sites have recently been added to CERCLIS because of their similar ownership, operator, or proximity to an identified SIA site. The information contained in Section II Site Name and Location: items 01 thru 10 may be found to vary from the existing CERCLIS information; the information contained on EPA Form 2070-12 should be used henceforth as more accurately identifying the site name and location.

Information to complete Form 2070-12 has been acquired from a number of sources including, but not limited to, SIA printouts, CERCLIS, the Illinois State Reclamation Plan for Abandoned Mined Land, and county plat books. Considering the age; of certain information, and the lack of specificity, some interpretation and judgement has been required in reporting all information. Where duplication of material with a moderate confidence level occurred, that information has been reported. Where conflicting data has appeared, the most current information with the highest degree of confidence has been used.

The materials of major concern at this location, with potential environmental impact, would be gob piles, acid mine drainage, and impoundments to retain mine drainage and coal wash plant process waters. Low pH and high iron concentrations have long been associated with mine drainage. Iron pyrites and marcasites (FeS $_2$) constitute approximately 25% of the mineral fraction of Illinois coals and thru a complex oxidation reaction yield H $_2$ SO $_4$ and FeSO $_4$ providing the sources for low pH and Fe release problems. More recent concerns are being raised because of the heavy metal constituents of mine run coal, which are contained primarily in the mineral fraction and removed to the gob pile, with the pyrites, during initial processing.

USEPA publication EPA-650/2-74-054 summarizes work done by the Illinois State Geological Survey and raises points of concern for this area of Illinois. Pages 33 thru 50 of this report summarize analytical results obtained on four major Illinois coals and fractions of the coals obtained by specific gravity separation techniques. Looking at the Herrin #6 coal member, fractions of 1.60 specific gravity and greater, metals are reported in the following ranges.

	Low	<u>High</u>		Low	<u>High</u>
As:	23.0	244.0 ppm	Ni:	76	102 ppm
Cd:	4.8	152.0 ppm	Pb:	210	2162 ppm
Cr:	31	71.0 ppm	Sb:	2.8	12.0 ppm
Cu:	61	89.0 ppm	Se:	6.8	21.0 ppm
Hg:	0.68	3.80 ppm	٧:	60	85 ppm
Mn:	74	457 ppm	Zn:	570	15170 ppm
Mo:	14	215 ppm	Zr:	21	32 ppm

Comparing the above information against surface water quality data reported in "Hydrology of Area 35, Eastern Region, Interior Coal Province, Illinois and Kentucky" published by the U.S. Dept. of Interior, Geologic Survey; open file report #81-403, portions of which are attached, one begins to grasp the potentials for environmental degradation presented by mine drainage. In the USGS study, the maximum concentration of Ni found upstream of mining activity was 10 ppb, whereas downstream, the maximum value was 630 ppb. Mean values of Ni found were 6.1 ppb upstream, and 113 ppb downstream. The values for Ni represent a 63 fold increase of downstream maximum over the upstream maximum. Increases in the maximum concentrations of Cu were 27 fold, Zn at 32 fold, Mg at 11.9 fold, and Al at 2,238 fold increase.


The Illinois Department of Mines and Minerals and numerous private firms are involved in reclamation/remediation activities at a number of these sites. It is entirely possible that this site presents no hazard at this time, but the reverse is also possible. There is no evidence to indicate waste disposal, other than that associated with mine activity. A low priority has been assigned and site inspection activity should be considered on a representative selection of these sites on a time available basis. A higher priority was not assigned because of the regional scope of these sites and the high probability of existing remedial activities at high pollution potential sites.

RML:tk:4/8/49(3/21/86)

Attachment



HYDROLOGY OF AREA 35, EASTERN REGION, INTERIOR COAL PROVINCE, ILLINOIS AND KENTUCKY

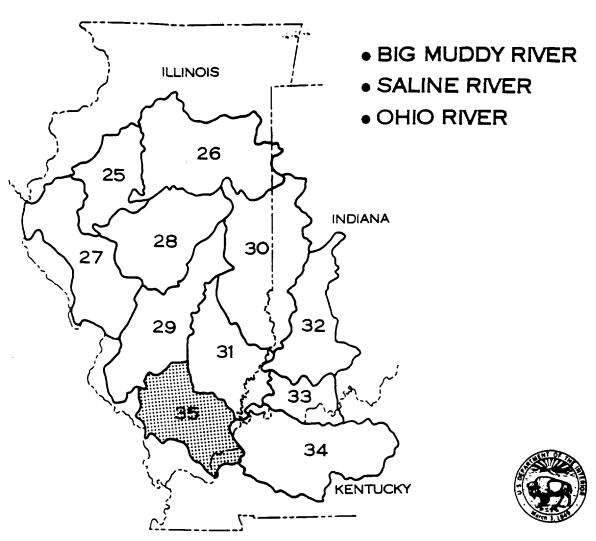

UNITED STATES DEPARTMENT OF THE INTERIOR GEOLOGICAL SURVEY

WATER-RESOURCES INVESTIGATIONS OPEN-FILE REPORT 81-403

HYDROLOGY OF AREA 35, EASTERN REGION, INTERIOR COAL PROVINCE, ILLINOIS AND KENTUCKY

BY

E.E. ZUEHLS, G.L. RYAN, D.B. PEART, AND K.K. FITZGERALD

U.S. GEOLOGICAL SURVEY WATER-RESOURCES INVESTIGATIONS 81-403



8.0 SURFACE WATER (Continued) 8.2 SURFACE-WATER QUALITY (Continued) 8.2.4 IRON

IRON CONCENTRATIONS ARE HIGHER DOWNSTREAM THAN UPSTREAM OF MINING

Dissolved iron ranged from 0 to 640 micrograms per liter (µg/L) at sites upstream of mining and from 0 to 1,100,000 µg/L at sites downstream of mining. Total recoverable iron ranged from 100 to 31,000 µg/L at the upstream sites and from 0 to 2,100,000 µg/L at the downstream sites.

Iron is the fourth most abundant element in the Earth's crust with 4.7 percent (Petrucci, 1972). It is an important constituent of the surface and ground waters in this area because of its abundance in the sedimentary rocks of the Pennsylvanian System. Under natural conditions, in sedimentary rock and ground water, iron is found primarily in the ferrous form (Fe²). It is the abundance and the instability of ferrous iron, when exposed to air, that probably influence many chemical reactions downstream of mining. Surface-mining processes increase the amount of iron available to the system by exposing more surface area of iron-bearing minerals to weathering conditions. Geologic and erosional factors at sites upstream of mining maintain fairly stable concentrations of iron in streams.

At sites upstream of mining, the measured range of concentration for dissolved iron was from 0 to 640 μ g/L with a mean of about 110 μ g/L. At sites downstream of

mining, concentrations of dissolved iron ranged from 0 to 1,100,000 μ g/L with a mean of about 20,000 μ g/L or approximately 20 milligrams per liter (mg/L) (fig. 8.2.4-1 and 8.2.4-2 and table 8.2.4-1).

Total recoverable iron for the sites upstream of mining ranged from 100 to 31,000 μ g/L with a mean of about 2,400 μ g/L. Total recoverable iron for the downstream sites ranged from 0 to 2,100,000 μ g/L with a mean of about 37,800 μ g/L or approximately 38 mg/L (fig. 8.2.4-1 and 8.2.4-3 and table 8.2.4-2).

Concentrations of dissolved iron in surface water seldom reach 1 mg/L (American Public Health Association, 1976, p. 207). For the upstream sites, the entire range of values is well below this level. The surface water of areas downstream of mining sometimes exceeded 1 mg/L of dissolved iron.




Figure 8.2.4-1 Range of dissolved iron and total recoverable iron concentrations measured at sites upstream and downstream of mining

8.0 SURFACE WATER (Continued) 8.2 SURFACE-WATER QUALITY (Continued) 8.2.5 MANGANESE

CONCENTRATIONS OF DISSOLVED AND TOTAL RECOVERABLE MANGANESE ARE HIGHER DOWNSTREAM THAN UPSTREAM OF MINING

Mean values of dissolved and total recoverable manganese concentrations were approximately 7 to 10 times greater at the sites downstream of mining than at the upstream sites.

Manganese is a common element widely distributed in igneous rocks and soils, but its total abundance in the Earth's crust is small enough to put it in the list of "trace" elements. Manganese and iron have similar electronic configurations and behave similarly. Because manganese has a lower affinity for oxygen, it stays in solution longer than iron (Rankama and Sahama, 1950).

For the sites upstream of mining in the study area, the measured concentrations of dissolved manganese ranged from 30 to 4,900 micrograms per liter (μ g/L) with a mean of about 560 μ g/L. This compares to a measured range of 20 to 91,000 μ g/L and a mean of about 4,100 μ g/L for the sites downstream of mining (fig. 8.2.5-1 and 8.2.5-2 and table 8.2.5-1).

Total recoverable manganese for the sites upstream of mining ranged from 30 to 3,900 μ g/L with a mean of

about 570 μ g/L. Downstream of mining the measured values of total recoverable manganese ranged from 20 to 240,000 μ g/L with a mean of about 5,590 μ g/L (fig. 8.2.5-1 and 8.2.5-3 and table 8.2.5-2).

According to Rankama and Sahama (1950) the Mn: Fe ratio in natural carbonate waters is about 5:1. This ratio is approximated by the upstream data for which the mean dissolved manganese value was $560 \mu g/L$ and the mean dissolved iron value was $110 \mu g/L$. The mean values of dissolved manganese and dissolved iron for the downstream sites are $4,100 \mu g/L$ and $20,000 \mu g/L$, respectively, resulting in a Mn: Fe ratio of 0.21:1. This decrease in the Mn: Fe ratio reflects the relatively large upstream to downstream increase in iron concentrations compared to manganese concentrations.




Figure 8.2.5-1 Range of dissolved and total recoverable manganese concentrations measured at sites upstream and downstream of mining

8.0 SURFACE WATER (Continued) 8.2 SURFACE-WATER QUALITY (Continued) 8.2.6 SULFATE

SULFATE CONCENTRATIONS ARE HIGHER DOWNSTREAM THAN UPSTREAM OF MINING

Concentrations of sulfate ranged from 12 to 500 milligrams per liter (mg/L) at the sites upstream of mining and from 15 to 12,000 mg/L at the downstream sites. Sulfate concentrations at downstream sites can be estimated using the equation:

SULFATE = 0.64 (SPECIFIC CONDUCTANCE) — 210.

Sulfur occurs in the coal and associated strata as metallic sulfides, mainly in the form of pyrite (FeS₂) and marcasite (FeS₂), which are also sources of ferrous iron. When oxidized, the sulfides yield the sulfate ion and ferric oxide. At the sites upstream of mining, the sulfates are probably introduced to the water from stream cuts through exposed Pennsylvanian rocks. This would be a fairly steady source of sulfate with erosion and oxidation contributing to the dissolution of sulfate materials.

The measured concentrations of sulfate at the upstream sites range from 12 to 500 mg/L with a mean value of 140 mg/L for all the observations at all the upstream sites. The upstream sulfate data contrast sharply with sulfate data for the downstream sites (table 8.2.6-1). The mean downstream sulfate value of 760 mg/L is larger than any value at an upstream site, and the maximum value of 12,000 mg/L is 24 times that of the largest value found at an upstream site (fig. 8.2.6-1). The minimum sulfate value of 15 mg/L at the downstream sites is approximately the same as the minimum at the upstream sites.

The contrast in sulfate concentrations between the sites upstream and downstream of mining, as seen in figure 8.2.6-2, suggests the higher sulfate concentrations downstream of mining probably result from the increased exposure of sulfide-bearing minerals to weathering in the mined area. Toler (1980) related annual sulfate loads to the area of surface mines as a percentage of total drainage area and showed that in southern Illinois sulfate can be used as an indicator of mine drainage (fig. 8.2.6-3).

For the sites downstream of mining a comparison was made between sulfate concentrations and specific conductance. There is a strong correlation (correlation coefficient = 0.93) between the two variables in the range for specific conductance from 400 to 5,000 μ mho/cm at 25°C. By using the regression equation represented by the line on the accompanying illustration (fig. 8.2.6-4), sulfate concentrations can be estimated at sites in the area downstream of mining from measurements of specific conductance between 400 and 5,000 μ mho/cm at 25°C.

8.0 SURFACE WATER (Continued) 8.2 SURFACE-WATER QUALITY (Continued) 8.2,7 ALKALINITY AND ACIDITY

ACIDITY VALUES ARE HIGHER DOWNSTREAM THAN UPSTREAM OF SURFACE MINING AREAS

Only one site upstream of mining had measurable acidity. Twenty-one sites downstream of mining had acidity values ranging from 0.1 to 99 milligrams per liter (mg/L) as the hydrogen ion (H⁺). Alkalinity values ranged from 0 to 390 mg/L as calcium carbonate (CaCO₃) at the upstream sites and from 0 to 520 mg/L as CaCO₃ at the downstream sites.

Acidity is defined as "the quantitative capacity of an aqueous media to react with hydroxyl ions" and is expressed in mg/L as the hydrogen ion (H*). It is an important parameter to measure in areas affected by surface mining because when present in significant amounts it is an indication that acid-forming materials are interacting with the surface water. Alkalinity is defined as the capacity of the solution to react with hydrogen ions and is commonly reported in mg/L as CaCO₃ even though CaCO₃ may not be the source of or be responsible for all the buffering capability.

One site upstream of mining had measurable acidity. Twenty-three of forty-eight sites downstream of mining had measurable acidity that ranged from 0.1 to 99 mg/L as H⁺ (fig. 8.2.7-1 and 8.2.7-2 and table 8.2.7-1).

Alkalinity at sites upstream of mining ranged from 0 to 390 mg/L as CaCO₃ with a mean of 92 mg/L as CaCO₃. The sites downstream of mining had a range in alkalinity from 0 to 520 mg/L as CaCO₃ with a mean of 88 mg/L (fig. 8.2.7-1 and table 8.2.7-2).

Although mean values for alkalinity at the upstream and downstream sites are similar (fig. 8.2.7-3), variations between sites, especially downstream of mining, are great. Surface mining exposes not only the pyrites and marcasites (acid-forming materials) but also the limestones (source of CaCO₃) of the Pennsylvanian System. The variability of alkalinity values at the sites downstream of mining may depend on the amounts of limestone exposed during mining.




Figure 8.2.7-1 Range of acidity and alkalinity values at sites upstream and downstream of mining

8.0 SURFACE WATER (Continued) 8.2 SURFACE-WATER QUALITY (Continued) 8.2.8 TRACE ELEMENTS AND OTHER CONSTITUENTS

CONCENTRATIONS OF TRACE ELEMENTS VARY IN THE STUDY AREA

Concentrations of many trace elements and other water-quality constituents differed between sites upstream and downstream of surface mining.

Concentrations of many dissolved constituents differed between sites upstream and downstream of mining as shown in figure 8.2.8-1. In water, copper, zinc, boron, calcium, nickel, magnesium, and aluminimal all had higher mean concentrations downstream of mining than upstream. Concentrations of carbon dioxide in

water and total iron in the bottom material were also higher downstream of mining. Mean concentrations of total manganese in bottom material showed little difference between upstream and downstream sites. Dissolved chloride concentrations were less downstream than upstream of mining.

Maximum 470,000 170,000 Maximum 7,700 18,700 63,000 8,000 Maximum 32,900 Mean 10,000 Musicana Mesn 7,700 18,700 Service Annual Control 8,200 Mean Maximum 2,600 Mariana St. 910 Mean 606 Maximum 630 Maximum S40 Maximum Man S 430 Maximum 270 Maximum 270 Maximum 302 Menn 237 Mean Man Si 210 Maximum S Mariana 146 Mean 115 Maximum 113 Mean Minimum M 67 Maximum 82 Meas 74 Mean Meas Maxim 40 69 S3 Mean 42 Mona Mean Maximum 23 36 30 Minimum 20 Maximum 22 Mean 22 Mean 16 Minimum 13 Mean 10 Maximum Maximum 10 7.9 Mean 6 Mean Munmum Mean 3 6.1 3 Minimum 2.8 Mean 2 Minimum 2 Minimum 0.5 Minimum THIT 0 Minimum Minama 0 O Minimum 0 Minimum O Minimum O Minimum O Minimum Downstream Downstream Downstream Downstream Downstream Downstream Downstream Downstream Downstream Upetream Upeaream Uperson Upstream Орыставля Upetream Upstream Upstream Upstream Uperream desolved macrogradus muligrams per bler Carbon Dioxide Copper General of F ă Ħ 2 332 ສ 22

11.

figure 8.2.8-1 Range of concentrations for various cumpitumes at piess upplents and downstream of mining.

8.0 SURFACE WATER
8.2 SURFACE WATER QUALITY

-ILLINOIS	S ENVIRONMENTROTECT	,	<u> </u>	MEMORANDUM
TO:		Chan	zell Jala	DATE: 4-3-86
FROM:			4123/04	_ Information only
SUBJECT:				_ Response requested
A) Origin	al CERCLIS I,	formation	<u> </u>	-
	POTENTIAL HAZA	ADOUS WASTE SIT	I. IDENTIF	
SEPA	PRELIMINAN PART 1 - SITE INFORMA	Y ASSESSMENT ATION AND ASSESSM	ENT IND 9	80893944
II. SITE NAME AND LOCA	TION	TO STREET ACUTE NO. OF	SPECIFIC LOCATION IDENTIFIER	
Coal Re	cycling Corp	1305 N		
Mario	cycling Corp	IL 62959	Williamson	CODE DIET
Marjo	<u> </u>		7077700000	
0) =		- 0		
	correction/Updat	e Intorm	ation	
IL SITE NAME AND LOCA 01 SITE HAME Appl common or d			SPECIFIC LOCATION IDENTIFIER	
03 CTY		5W/4 of	Sect 19 T.85,	-R,5E.
Brushy	Township:	- Unk	Saline	07COUNTY OF COME COOF 06T 165 22
() R-1'a	- 1 Con Connect	1. f E.	- ca+a T Co	
C) MATION	nal for Correct	DON OF LI	A. TO	mation.
Injo	(malion in H) a	fore is	Operator a	o grace
- offe	ces. Informali	on in B)	about more	accurately
ref	ces. Informati lecta site loca	ition us	given in	S.I.A.
				
·				
			······································	
				
		•		